

Constructing finite dimensional codes with optical continuous variables

S. PIRANDOLA, S. MANCINI, D. VITALI and P. TOMBESI

INFN, Dipartimento di Fisica, Università di Camerino, I-62032 Camerino, Italy

PACS. 03.67.Pp – First pacs description.

PACS. 42.65.-k – Second pacs description.

PACS. 42.50.Gy – Third pacs description.

Abstract. – We show how a qubit can be fault-tolerantly encoded in the infinite-dimensional Hilbert space of an optical mode. The scheme is efficient and realizable with present technologies. In fact, it involves two travelling optical modes coupled by a cross-Kerr interaction, initially prepared in coherent states, one of which is much more intense than the other. At the exit of the Kerr medium, the weak mode is subject to a homodyne measurement and a quantum codeword is conditionally generated in the quantum fluctuations of the intense mode.

Introduction. – Quantum Information has recently entered the domain of continuous variable (CV) systems [1, 2] and Quantum Error Correction theory in particular has been extended to the CV framework [3, 4]. In such a framework, the main damage induced by decoherence is typically a small diffusion in the two canonical coordinates characterizing the CV system, which may represent the position and momentum of a particle or two orthogonal field quadratures of an optical mode. Gottesman *et al.* have shown that these effects are best fought by encoding quantum information within appropriate *shift-resistant* quantum codes of the CV system [4]. The relevant aspect of the proposal of Ref. [4] is that, using qubits encoded in such a way, a universal set of fault-tolerant quantum gates can be implemented using only “cheap” standard devices which, in the case of a CV optical mode, correspond to beam splitters, phase shifters, squeezers, homodyne and photodetectors. In such a proposal, all the difficulties are confined to the preparation of the encoded states which, in the ideal limit, are superpositions of an infinite number of infinitely squeezed states and require the use of particular nonlinear interactions for their generation. The preparation of these shift-resistant quantum codes represents the main drawback of the Gottesman *et al.* proposal for universal fault-tolerant quantum computation in a CV system and therefore it is crucial to find an experimentally viable way to generate the quantum codewords employing optical CV modes. A first attempt has been based on a conditional scheme in which the CV system is coupled to a single qubit and which could be implemented on a single trapped ion [5]. Here, elaborating on a suggestion in [4] of using a nonlinear Hamiltonian of ponderomotive type, we present an all-optical scheme involving two modes interacting in a crossed-Kerr medium.

Ideal and approximate codewords. – Ref. [4] shows that a single qubit, whose generic state can be written as $c_0|0\rangle + c_1|1\rangle$, can be encoded in an oscillator with canonical coordinates $\hat{q}, \hat{p}$ (with $[\hat{q}, \hat{p}] = i$) so that the corresponding logical state $c_0\overline{|0\rangle} + c_1\overline{|1\rangle}$ is easily correctable with respect to small diffusion errors in both position and momentum. The codewords $\overline{|0\rangle}$ and $\overline{|1\rangle}$ are the simultaneous eigenstates with eigenvalue +1 of the two displacement operators $\hat{T}_q(2\theta) = \exp\{-2i\hat{p}\theta\}$ and $\hat{T}_p(2\pi\theta^{-1}) = \exp\{2i\pi\hat{q}/\theta\}$ (the so called *stabilizer generators* of the code [6]) with arbitrary $\theta \in \mathbb{R}$. The two codewords are a coherent superposition of infinitely squeezed states both in position and momentum, that is,

$$\overline{|0\rangle} = \sum_{s=-\infty}^{+\infty} |q = 2\theta s\rangle = \sum_{s=-\infty}^{+\infty} |p = \pi\theta^{-1}s\rangle \quad (1)$$

$$\overline{|1\rangle} = \hat{T}_q(\theta)\overline{|0\rangle} = \sum_{s=-\infty}^{+\infty} |q = 2\theta s + \theta\rangle = \sum_{s=-\infty}^{+\infty} (-1)^s |p = \pi\theta^{-1}s\rangle. \quad (2)$$

They have a comb-like structure with spacing 2θ in the q -space and π/θ in the p -space and are displaced with respect to each other by θ along the q -axis (this is also responsible for the alternating signs in the p -representation, see Fig. 1).

In a CV system, errors and decoherence manifest themselves through random shifts of the two quadratures $\hat{q}$ and $\hat{p}$. The present coding is designed for the case when these shifts are never too large, i.e., the error is correctable only if the shift is below a certain threshold. In fact, the recovery process is realized by measuring the stabilizer generators $\hat{T}_q(2\theta)$, which is equivalent to measure $\hat{p} \pmod{\pi\theta^{-1}}$ and therefore detects momentum shifts, and $\hat{T}_p(2\pi\theta^{-1})$, which is equivalent to measure $\hat{q} \pmod{\theta}$ and detects position shifts. Then the error is corrected by displacing the state to the nearest peak, that is, to the nearest multiple of $\pi\theta^{-1}$ along the $\hat{p}$ -axis and to the nearest multiple of θ along the $\hat{q}$ -axis. Therefore the recovery is successful only when the momentum shift Δp satisfies $|\Delta p| < \pi\theta^{-1}/2$ and the position shift Δq satisfies $|\Delta q| < \theta/2$, because otherwise the displacement would recover the wrong codeword, corrupting therefore the encoded information. An alternative choice for the codewords is the basis formed by the two superposition states $\overline{|\pm\rangle} \equiv (\overline{|0\rangle} \pm \overline{|1\rangle})/\sqrt{2}$, which are used in [4] for the error recovery in the p -space because they have the same displaced comb-like structure of $\overline{|0\rangle}$ and $\overline{|1\rangle}$ in the p -space rather than in the q -space (see Fig. 1). Practically, the two sets of codewords $\{\overline{|0\rangle}, \overline{|1\rangle}\}$, $\{\overline{|+\rangle}, \overline{|-\rangle}\}$ are needed to measure the stabilizers $\hat{T}_q(2\theta)$ and $\hat{T}_p(2\pi\theta^{-1})$ respectively [4].

In real experiments one can only create finite squeezing and, therefore, only approximate codewords, $\widetilde{|1\rangle} \sim \overline{|1\rangle}$, $\widetilde{|0\rangle} \equiv \hat{T}_q(\theta)\widetilde{|1\rangle}$ and $\widetilde{|\pm\rangle} \equiv (\widetilde{|0\rangle} \pm \widetilde{|1\rangle})/\mathcal{N}_{\pm}$ with $\mathcal{N}_{\pm} = \{2(1 \pm \text{Re}[\langle \widetilde{0} | \widetilde{1} \rangle])\}^{1/2}$. In this practical situation, even if we had only small position and momentum shifts satisfying the above conditions for a correct recovery, one would still have errors due to the use of approximate codewords possessing a nonzero overlap $\langle \widetilde{0} | \widetilde{1} \rangle$ and $\langle \widetilde{+} | \widetilde{-} \rangle$. These *intrinsic errors* manifest themselves once the measurement of a stabilizer is performed. The quality of an experimental implementation of the error correction scheme of [4] is therefore established by an *intrinsic error probability*, which can be considered as the largest error probability among those associated with the four approximate codewords $\widetilde{|0\rangle}, \widetilde{|1\rangle}, \widetilde{|\pm\rangle}$.

The all-optical implementation scheme. – Our proposal for encoding a qubit in a CV optical mode is schematically described in Fig. 2. We consider two radiation modes $\hat{a}$ and $\hat{b}$ ($[\hat{a}, \hat{a}^\dagger] = [\hat{b}, \hat{b}^\dagger] = 1$) impinging on a nonlinear medium where they interact through the cross-Kerr effect, described by the interaction Hamiltonian [7]

$$\hat{H} = \hbar\chi\hat{a}^\dagger\hat{a}\hat{b}^\dagger\hat{b}, \quad (3)$$

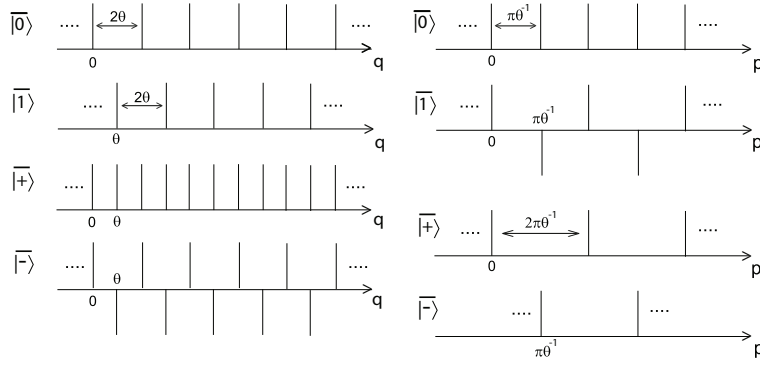


Fig. 1 – Schematic representation of the position and momentum wave functions of the four ideal codewords $|0\rangle$, $|1\rangle$, $|+\rangle$ and $|-\rangle$.

where χ is the cross-Kerr susceptibility of the medium. The two modes are both prepared in coherent states, $|\alpha\rangle$ and $|\beta\rangle$, with $\beta \gg \alpha$ (we take α and β real from now on). We are interested in the fluctuations of the $\hat{b}$ mode around the classical intense coherent state $|\beta\rangle$, and therefore, redefining the b mode through the displacement $\hat{b} \rightarrow \hat{b} + \beta$ and neglecting higher order contributions, the interaction Hamiltonian of Eq. (3) can be rewritten as

$$\hat{H} = \hbar\chi\beta\hat{a}^\dagger\hat{a}(\hat{b} + \hat{b}^\dagger) = -\hbar k\hat{a}^\dagger\hat{a}(\hat{b} + \hat{b}^\dagger). \quad (4)$$

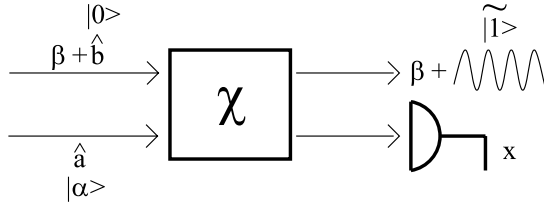


Fig. 2 – Schematic description of the all-optical CV encoding scheme.

If the losses within the Kerr medium are negligible the system dynamics is unitary and one has that the two-mode state after an interaction time t within the Kerr medium is given by

$$|\phi(t)\rangle = \pi^{-1} \int d^2\gamma e^{-(\alpha^2 + |\gamma|^2)/2} \sum_{n=0}^{\infty} \frac{\alpha^n}{\sqrt{n!}} \exp\{nkt[i\gamma^* - nkt/2]\} |n\rangle_a |\gamma\rangle_b \quad (5)$$

where $|n\rangle_a$ and $|\gamma\rangle_b$ respectively represent a number state for $\hat{a}$ and a coherent state for $\hat{b}$.

Just at the exit of the Kerr medium, mode $\hat{a}$ is subject to a homodyne measurement of the field quadrature $\hat{x} = (\hat{a} + \hat{a}^\dagger)/\sqrt{2}$ with measurement result x . As a consequence, the two modes are disentangled, with mode $\hat{a}$ in the corresponding eigenstate $|x\rangle_a$ of $\hat{x}$ and mode $\hat{b}$ in the state conditioned to the measurement result x , which, introducing the quadratures $\hat{q} = (\hat{b} + \hat{b}^\dagger)/\sqrt{2}$ and $\hat{p} = (\hat{b} - \hat{b}^\dagger)/i\sqrt{2}$, can be described by the spatial and momentum wave

functions

$$\varphi(q; \tau, \alpha, x) = \pi^{-1/2} \mathcal{N} \sum_{n=0}^{\infty} \mu_n(\alpha, x) \exp[-\frac{1}{2}q^2 + i\pi n\tau q] \quad (6)$$

$$\psi(p; \tau, \alpha, x) = \pi^{-1/2} \mathcal{N} \sum_{n=0}^{\infty} \mu_n(\alpha, x) \exp[-\frac{1}{2}(p - \pi n\tau)^2], \quad (7)$$

where $\mathcal{N} = \pi^{1/4} \{\sum_{n,n'=0}^{\infty} \mu_n \mu_{n'} e^{-\frac{\pi^2}{4}(n-n')^2 \tau^2}\}^{-1/2}$, $\mu_n(\alpha, x) \equiv \rho_n(\alpha, x) e^{-(\alpha^2 + x^2)/2}$, $\rho_n(\alpha, x) \equiv \alpha^n H_n(x)/2^{n/2} n!$, with $H_n(x)$ the Hermite polynomials, and we have introduced a dimensionless, scaled, interaction time $\tau = \sqrt{2}kt/\pi$. Our proposal consists in taking this conditional state as the approximate codeword $|\widetilde{1}\rangle$, i.e., $\varphi(q; \tau, \alpha, x) = \langle q|\widetilde{1}\rangle$ and $\psi(p; \tau, \alpha, x) = \langle p|\widetilde{1}\rangle$, with the following correspondence of parameters $\theta \leftrightarrow 1/2\tau$. The other approximate codeword state $|\widetilde{0}\rangle$ is then obtained by applying a displacement, i.e., $|\widetilde{0}\rangle \equiv \hat{T}_q(1/2\tau)|\widetilde{1}\rangle$, while $|\pm\rangle$ are obtained using the fault-tolerant schemes discussed in [4].

Evaluating the performance of the encoding scheme . – From the wave functions of the encoded states shown in Fig. 1 it is easy to define and calculate the intrinsic error probabilities. In fact, an intrinsic error occurs when: *i*) given $|\widetilde{1}\rangle$, the measurement of $\hat{q} \pmod{\theta}$ gives a result inside one of the error regions $R_s^1 \equiv [(2s - 1/2)\theta, (2s + 1/2)\theta]$ for integer s ; *ii*) given $|\widetilde{0}\rangle$, the measurement of $\hat{q} \pmod{\theta}$ gives a result inside one of the error regions $R_s^0 \equiv [(2s + 1/2)\theta, (2s + 3/2)\theta]$; *iii*) given $|\widetilde{-}\rangle$, the measurement of $\hat{p} \pmod{\pi/\theta}$ gives a result inside one of the error regions $R_s^- \equiv [(2s - 1/2)(\pi/\theta), (2s + 1/2)(\pi/\theta)]$; *iv*) given $|\widetilde{+}\rangle$, the measurement of $\hat{p} \pmod{\pi/\theta}$ gives a result inside one of the error regions $R_s^+ \equiv [(2s + 1/2)(\pi/\theta), (2s + 3/2)(\pi/\theta)]$. Therefore, the corresponding intrinsic error probabilities are given by $\Pi_q(\tau, \alpha, x) \equiv \sum_{s=-\infty}^{+\infty} \int_{R_s^1} |\langle q|\widetilde{1}\rangle|^2 dq$, for both cases *i*) and *ii*) and by $\Pi_{\pm} \equiv \sum_{s=-\infty}^{+\infty} \int_{R_s^{\pm}} |\langle p|\widetilde{\pm}\rangle|^2 dp$ for cases *iii*) and *iv*). As discussed above, we can take as the overall intrinsic error probability of the proposed approximate encoding the largest error probability, that is, $\Pi_{\max}(\tau, \alpha, x) \equiv \max[\Pi_q(\tau, \alpha, x), \Pi_{-}(\tau, \alpha, x), \Pi_{+}(\tau, \alpha, x)]$. It can be seen that this quantity is a decreasing function of the scaled interaction time τ , at least for sufficiently large values of τ . It is therefore convenient to choose a large τ (which means using a large enough value of the coherent amplitude β) and simply consider the asymptotic value $\Pi_{\max}^{\infty}(\alpha, x) \equiv \lim_{\tau \rightarrow \infty} \Pi_{\max}(\tau, \alpha, x)$. The threshold value τ_{th} of the scaled interaction time beyond which the asymptotic values of the error probabilities are essentially reached can be easily evaluated; τ_{th} depends upon α and for $0.5 < \alpha < 2.5$ it is $\tau_{th} \simeq 2$ and therefore easily achievable with a moderate value of β .

The asymptotic error probabilities $\Pi_q^{\infty}(\alpha, x)$ and $\Pi_{\pm}^{\infty}(\alpha, x)$ can be evaluated analytically and are given by

$$\Pi_q^{\infty}(\alpha, x) = \frac{1}{2} + \frac{2}{\pi} \frac{\sum_{n,k=0}^{\infty} (-1)^k (2k+1)^{-1} \rho_n \rho_{n+2(2k+1)}}{\sum_{n=0}^{\infty} \rho_n^2} \quad (8)$$

$$\Pi_{\pm}^{\infty}(\alpha, x) = \frac{\sum_{k=0}^{\infty} \rho_{2k+1}^2}{2 \sum_{k=0}^{\infty} (\rho_{2k+1}^2 + 2\rho_{4k+(1\mp 1)}^2)} \quad (9)$$

and their behavior as a function of the homodyne measurement result x is shown in Fig. 3a.

It is evident from Fig. 3 that the lowest intrinsic error is achieved for measurement results x as close as possible to $x = 0$, which is the measurement result for which $\Pi_{\max}^{\infty}(\alpha, x)$ is minimum. The probability densities in q and p for the four approximate codewords $|\widetilde{0}\rangle$, $|\widetilde{1}\rangle$,

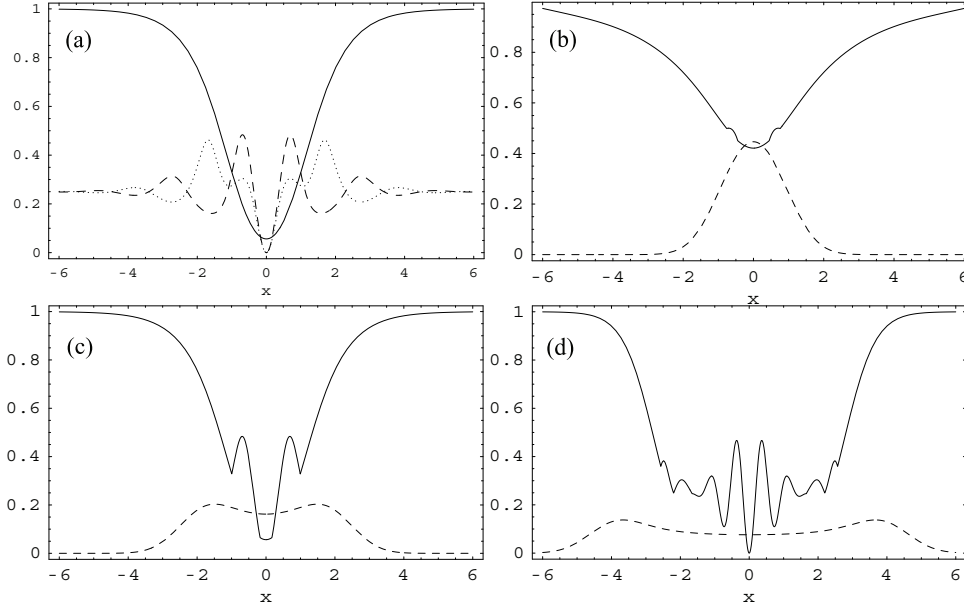


Fig. 3 – (a) Asymptotic error probabilities $\Pi_q^\infty(\alpha, x)$ (solid line), $\Pi_-^\infty(\alpha, x)$ (dashed line), $\Pi_+^\infty(\alpha, x)$ (dotted line) versus the homodyne measurement result x and for $\alpha = 1.5$. The error probability $\Pi_{\max}^\infty(\alpha, x)$ is given by the largest value between these three functions and its behavior for three different values of α is shown (solid line) in (b) ($\alpha = 0.5$), (c) ($\alpha = 1.5$) and (d) ($\alpha = 3$). The dashed line in (b), (c) and (d) corresponds to the asymptotic probability density, $P^\infty(x, \alpha)$, of getting the result x .

and $|\pm\rangle$ corresponding to the particular measurement result $x = 0$ are shown in Fig. 4, where the parameter values $\alpha = \tau = 2$ have been chosen. A first qualitative comparison with the ideal codewords of Fig. 1, shows that the present scheme is able to generate well approximated codewords.

It is also evident from Fig. 3 that for values of x of the order or larger than α the error probability becomes unacceptably large. Therefore the coding scheme proceeds by fixing an acceptable interval centered around $x = 0$ for the homodyne result, say $-\alpha/z < x < \alpha/z$, with $z \geq 1$, and accepting the resulting approximate codeword $|1\rangle$ only if x lies within this interval. In such a case one has two relevant quantities: *i*) the *success probability* of the coding scheme $P(z, \alpha) = \int_{-\alpha/z}^{+\alpha/z} P^\infty(x, \alpha) dx$, where $P^\infty(\alpha, x) = \pi^{-1/2} \sum_{n=0}^{\infty} \mu_n^2$ is the probability density of getting the result x in the homodyne measurement (referred to the asymptotic limit of large τ); *ii*) the corresponding *mean intrinsic error probability* $\Pi(z, \alpha) = \int_{-\alpha/z}^{+\alpha/z} P^\infty(x, \alpha) P(z, \alpha)^{-1} \Pi_{\max}^\infty(\alpha, x) dx$. The success probability $P(z, \alpha)$ gives the fraction of times a satisfactory approximate codeword is generated. The mean intrinsic error probability $\Pi(z, \alpha)$ is the most relevant quantity since it measures the effective quality of the generated codewords. The behavior of these two probabilities is plotted as a function of z for different values of α in Fig. 5. It is easy to see that for $z = 0$, which means accepting all measurement results, $\Pi(0, \alpha) \geq 1/2$, i.e. the encoding is too bad and cannot be used for quantum information processing. It is also evident that the best results are achieved for vary large z , i.e., when only values very close to $x = 0$ are accepted, where however the success probability

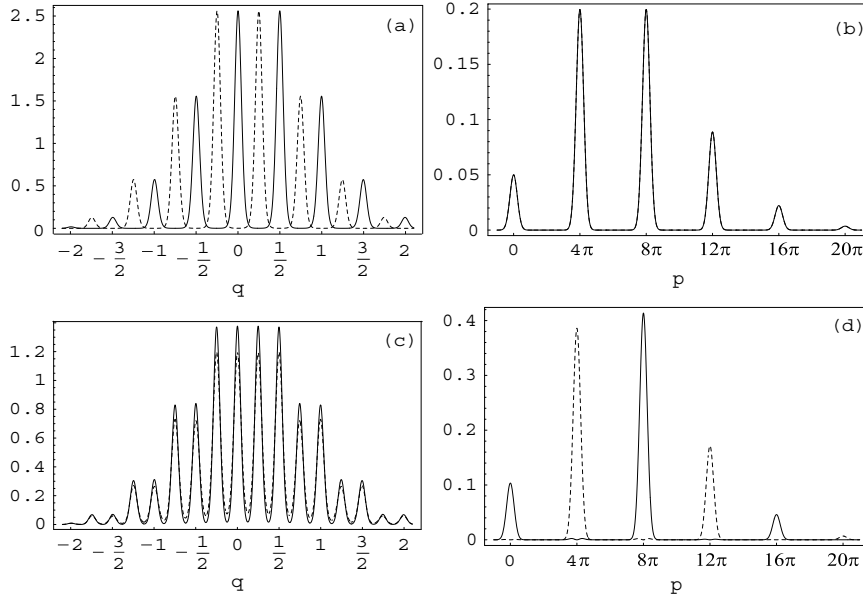


Fig. 4 – Probability densities of the approximate codewords $\widetilde{|0\rangle}$, $\widetilde{|1\rangle}$, $\widetilde{|\pm\rangle}$ for $\alpha = \tau = 2$ ($\theta = 1/4$). In (a) the probability densities $|\langle q|\widetilde{|0\rangle}|^2$ (solid line) and $|\langle q|\widetilde{|1\rangle}|^2$ (dashed line) are shifted by $\theta = 1/4$ as expected, while in (b) the corresponding probability densities $|\langle p|\widetilde{|0\rangle}|^2$ and $|\langle p|\widetilde{|1\rangle}|^2$ (solid line) coincide as expected, with spikes at $\pi\theta^{-1}s = 4\pi s$. In (c) the probability densities $|\langle q|\widetilde{|+\rangle}|^2$ (solid line) and $|\langle q|\widetilde{|-\rangle}|^2$ (dashed line) differ only slightly, with spikes at $\theta s = s/4$ while in (d) their momentum probability densities $|\langle p|\widetilde{|+\rangle}|^2$ (solid line) and $|\langle p|\widetilde{|-\rangle}|^2$ (dashed line) are approximately shifted by $\pi\theta^{-1} = 4\pi$.

becomes lower. In general the value of the coherent amplitude α has not to be either too large or too small. In fact, if it is too small, the intrinsic error probability is always too large (see Fig. 5 for $\alpha = 1$), while if it is too large, $\Pi(z, \alpha)$ stays around the value $\Pi(z, \alpha) = 1/4$ for a large interval of z (see Fig. 5 for $\alpha = 3, 4, 5$) due to the oscillating behavior of $\Pi_{\max}^{\infty}(\alpha, x)$ (see Figs. 3(c) and 3(d)). This fact implies that one has to use very large values of z to achieve an acceptable intrinsic error, corresponding however to a very low success probability. We see from Fig. 5 that one has a good compromise between success probability and intrinsic error probability for intermediate α , such as, for example, $1.5 \leq \alpha \leq 2$. As an example, when $\alpha = 2$ and $z \simeq 27$ one has a mean intrinsic error probability $\Pi(27, 2) \sim 1.0\%$ and a success probability $P(27, 2) \sim 1.7\%$.

Conclusions. – We have presented an all-optical conditional scheme able to generate the quantum codewords of the CV encoding scheme proposed in Ref. [4] for fault tolerant quantum computation. The generation of the encoded states is the most difficult part of that proposal and necessarily involves a nonlinear interaction. The present scheme involves two travelling beams initially prepared in coherent states interacting in a nonlinear cross-Kerr medium and is feasible with present technologies.

REFERENCES

- [1] L. Vaidman, Phys. Rev. A **49**, 1473 (1994); A. Furusawa, *et al.* Science **282**, 706 (1998).

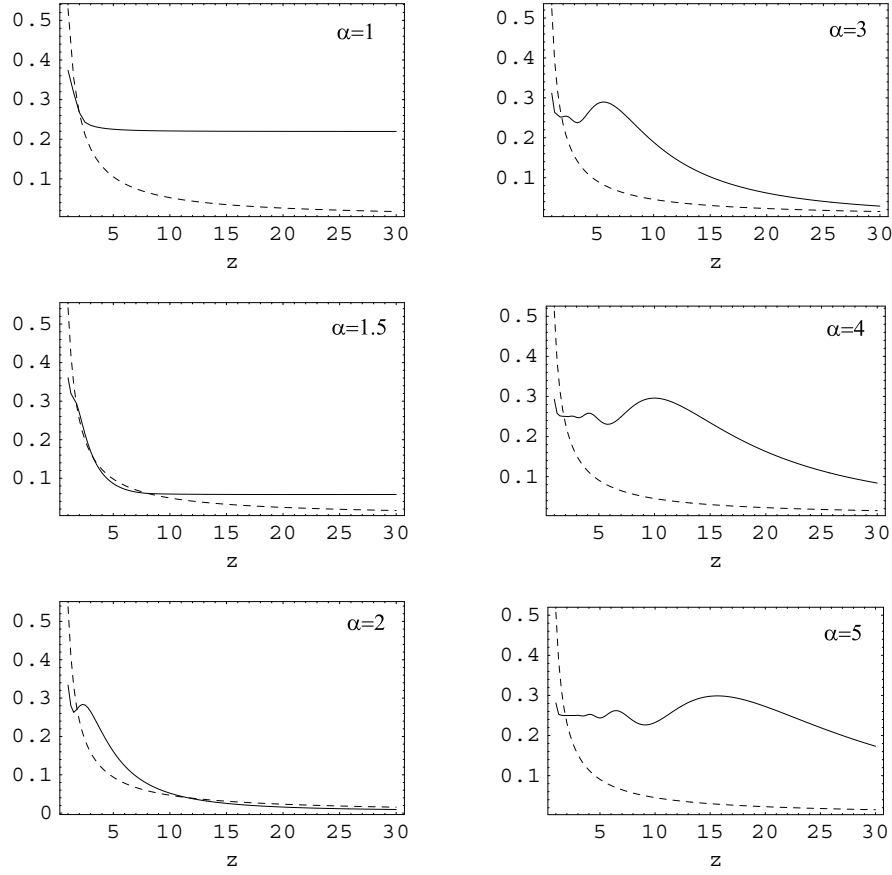


Fig. 5 – Success probability $P(z, \alpha)$ (dashed line) and mean intrinsic error probability $\Pi(z, \alpha)$ (solid line) versus z for $\alpha = 1, 1.5, 2, 3, 4, 5$.

- [2] S. Lloyd and S. L. Braunstein, Phys. Rev. Lett. **82**, 1784 (1999).
- [3] S. Braunstein, Phys. Rev. Lett. **80**, 4084 (1998); S. Lloyd and J. E. Slotine, Phys. Rev. Lett. **80**, 4088 (1998).
- [4] D. Gottesman, A. Kitaev, and J. Preskill, Phys. Rev. A **64**, 012310 (2001).
- [5] B. C. Travaglione and G. J. Milburn, Phys. Rev. A **66**, 052322 (2002).
- [6] D. Gottesman, Phys. Rev. A **54**, 1862 (1996).
- [7] N. Imoto, H. A. Haus, and Y. Yamamoto, Phys. Rev. A **32**, 2287 (1985).